

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 24 TWN. 14_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 4-16-10
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: 24" PwP fence post (center of)
Method of Establishment: County: 2-6-1989
IN S.P.C. E Zone, NAD 83 (1986)
Name: 14022403
N: 488 645.493 9(m)
E: 49 919.631 6(m)

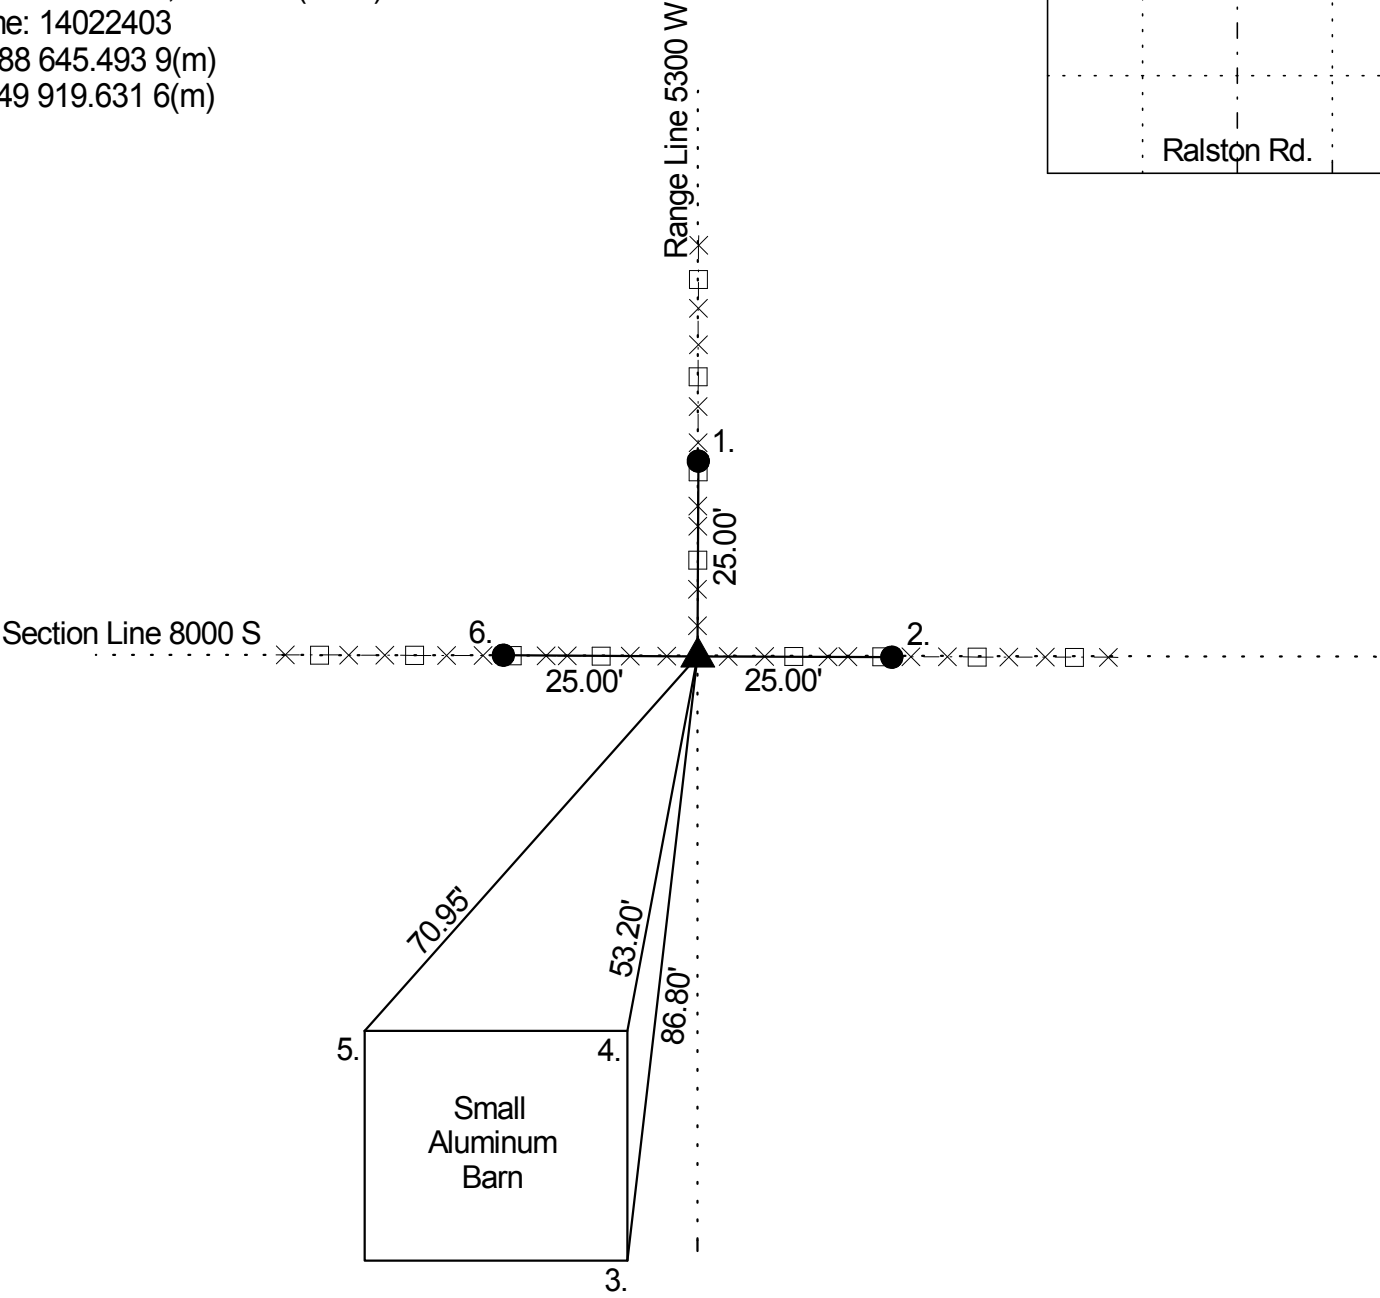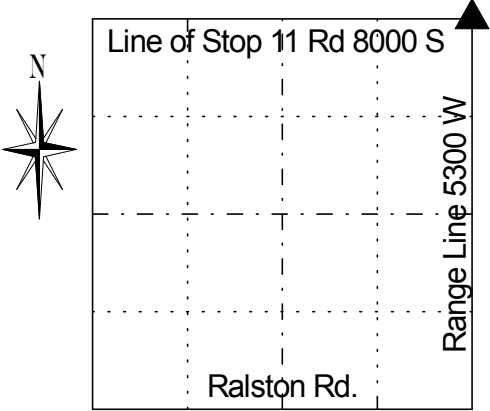

Corner originally set as a post in 1819 by John McDonald with the following witnesses: 24" Beech bearing S 11 W 4 links and a 10" Ash bearing N 9 E 17 links (Marion County Atlas p. 3). Corner referenced by Kent on 6/4/1979 and called a 5/8" rebar. Corner referenced by Green on 1/31/86 and called a 5/8" rebar. Corner referenced by Wilcoxen on 2/6/89 and called a 24" PWP fence post. Corner referenced by Kiste on 8/24/1999 and called a 24" PWP fence post. Corner referenced by Wilcoxen on 4/16/2010 and called a 24" PWP fence post. Per GLO notes the NW closing corner of 19-14-3 was 8 links north of this post.

REF	DISTANCE	DESCRIPTION
1.	25.00'	Rebar set
2.	25.00'	Rebar set
3.	86.80'	SE corner of aluminum of barn
4.	53.20'	NE corner of aluminum of barn
5.	70.95'	NW corner of aluminum of barn
6.	25.00'	Rebar set